



THE BUG BLOCKER® SCREEN


VERTICAL LIFT
SWITCH TRACK

| | | | |
|---|--|---------------|-----|
| COMPANY | | PREPARED BY | |
| EMAIL | | PHONE NUMBER | |
| ADDRESS | | | |
| CITY | | STATE | ZIP |
| PURCHASE ORDER NUMBER | | DATE REQUIRED | QTY |
| TAG | | | |
| SPECIAL INSTRUCTIONS (Please note if this is for a quote) | | | |

- A** Any interference for Rasco track? Yes No
- B** What is the existing door thickness? _____ in
- C** What is the track width? 2 in 3 in
- D** Is the existing track in good condition? Yes No
- E** When open, can the existing door stop a minimum of 7" above the opening? Yes No
- F** Opening Width: _____ ft _____ in
- G** Opening Height: _____ ft _____ in
- H** Existing Door Width: _____ ft _____ in
- I** Existing Door Height: _____ ft _____ in
- J** Outside to outside of existing track? _____ ft _____ in
- K** What is the distance from track to bollard? _____ in
- L** Mesh size?
 - 12 mesh stainless 30 mesh stainless
 - 16 mesh stainless Special
- M** If existing door is motor operated, provide an interlock switch on Rasco track. Yes No
- N** If Rasco door is to be motor operated, provide an interlock switch. Yes No
- O** Is the top seal attached? If so, where?
 - Attached to header Attached to door
- P** If the graduated hinge count is not typical (1,2,3,4 etc.)
What is it? _____


✉ EMAIL SURVEY FORM TO RASCO

DOOR SIDE VIEW

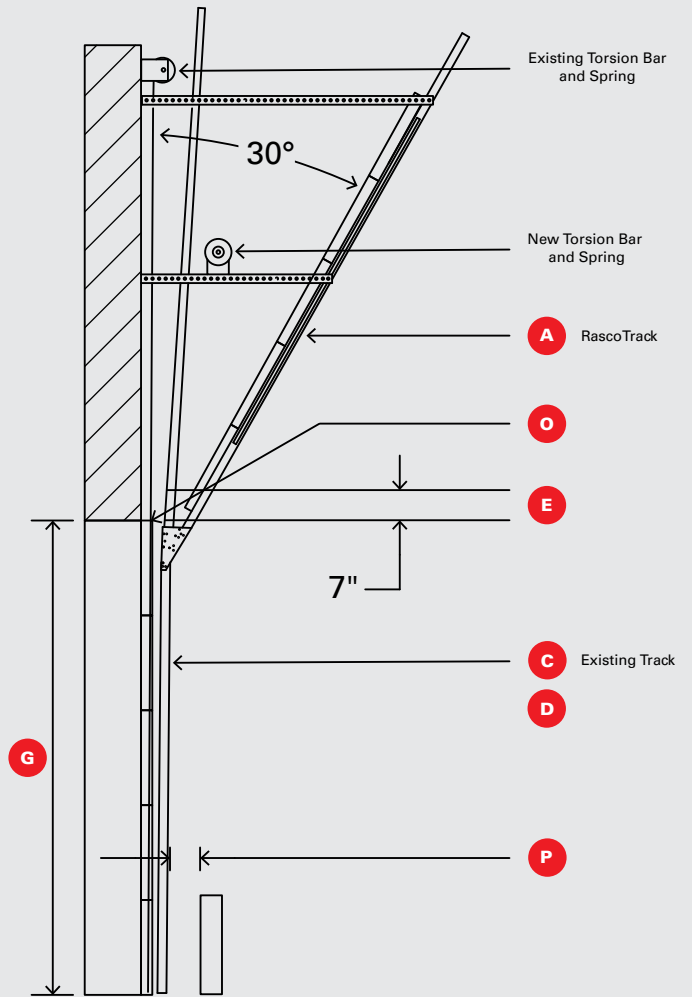

NOTES: A torsion bar support is required on all doors 10' or wider.
Switch track cannot be used if existing door has outside pull cables or has TKO, Workhorse or Barcol type tracks.
The Rasco door has outside pull brackets/cables.

DOORTOP ABOVE

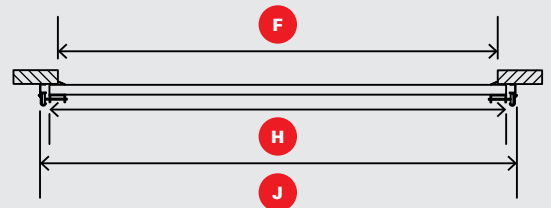


Measuring Guide



1

Track to bollard

To make sure you have clearance for your Rasco door.

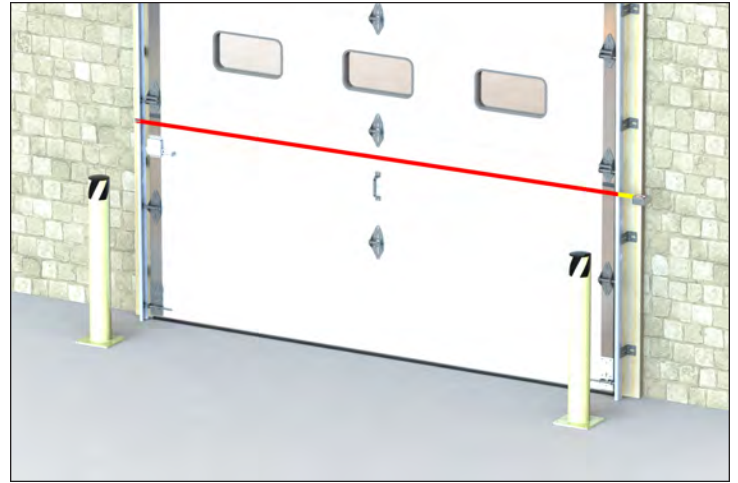

2

Outside to outside of existing track


To ensure a proper fit with your door.



3

Distance from wall to furthest part of existing track at top of the opening

To ensure a proper seal on the sides, many tracks are farther away from wall at top of opening.

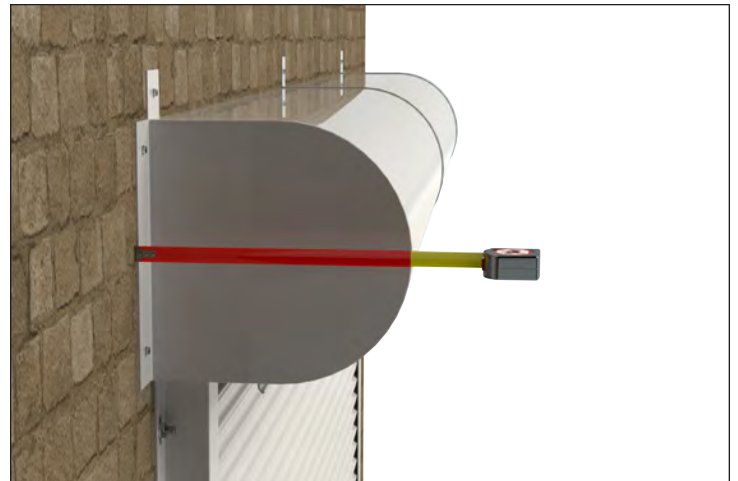

4

Wall to outside edge of roll or distance to back of roll

To ensure a tight seal on the sides.

09/30/24