




THE BUG BLOCKER® SCREEN

STANDARD LIFT
SWITCH TRACK

COMPANY		PREPARED BY	
EMAIL		PHONE NUMBER	
ADDRESS			
CITY		STATE	ZIP
PURCHASE ORDER NUMBER		DATE REQUIRED	QTY
TAG			
SPECIAL INSTRUCTIONS (Please note if this is for a quote)			


- A** Any interference for Rasco track? Yes No
- B** Select an Option:
 - B1 - High lift the existing track 8" (best option)
 - B2 - Add fixed panel to top of opening
- C** Floor to existing horizontal track? _____ ft _____ in
- D** What is the existing door thickness? _____ in
- E** What is the track width? 2 in 3 in
- F** Is the existing track in good condition? Yes No
- G** When open, can the existing door stop a minimum of 7" above the opening? Yes No
- H** Opening Width: _____ ft _____ in
- I** Opening Height: _____ ft _____ in
- J** Existing Door Width: _____ ft _____ in
- K** Existing Door Height: _____ ft _____ in
- L** Outside to outside of existing track? _____ ft _____ in
- M** What is the distance from track to bollard? _____ in
- N** Mesh size?
 - 12 mesh stainless 30 mesh stainless
 - 16 mesh stainless Special
- O** If existing door is motor operated, provide an interlock switch on Rasco track. Yes No
- P** If Rasco door is to be motor operated, provide an interlock switch. Yes No
- Q** If the graduated hinge count is not typical (1,2,3,4 etc.)
What is it? _____

DOOR SIDE VIEW

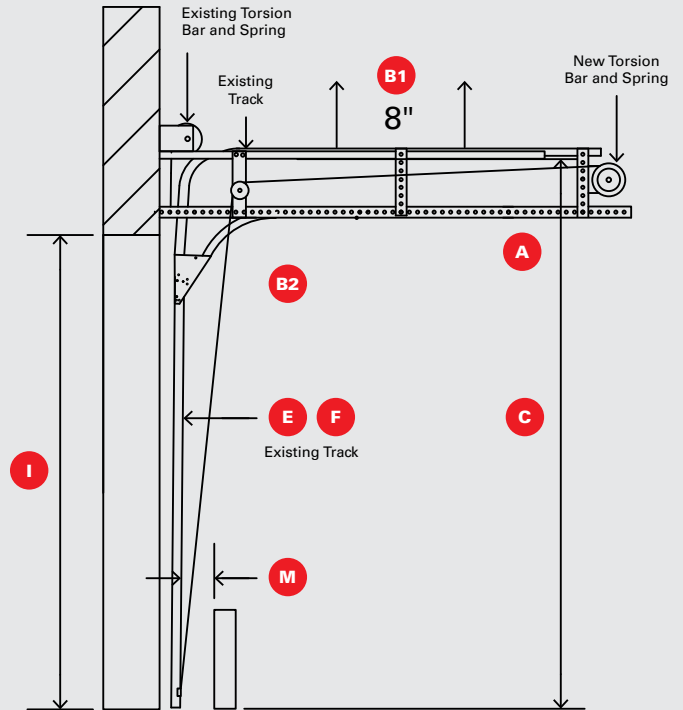

NOTES: A torsion bar support is required on all doors 10' or wider and a solid shaft if 12' or wider. Switch track cannot be used if existing door has outside pull cables, or has TKO, Workhorse or Barcol type tracks.

DOORTOP ABOVE

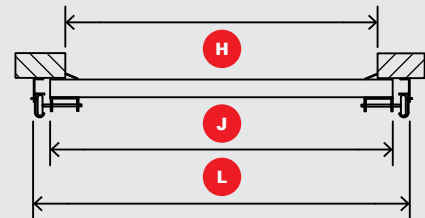

✉ EMAIL SURVEY FORM TO RASCO


Measuring Guide



1

Track to bollard

To make sure you have clearance for your Rasco door.

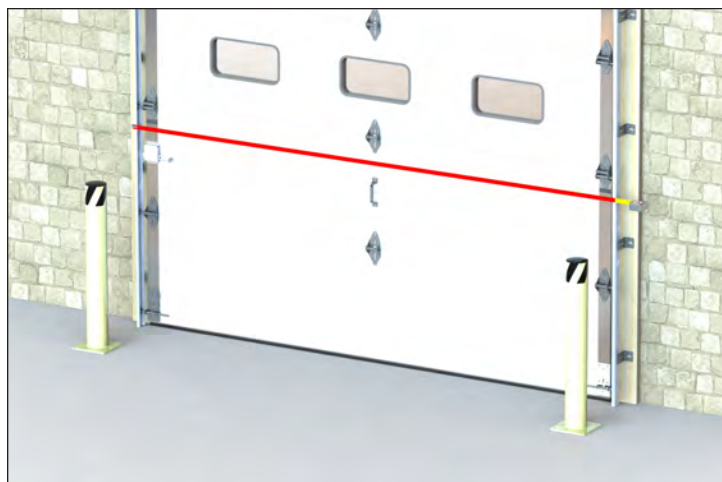

2

Outside to outside of existing track


To ensure a proper fit with your door.



3

Distance from wall to furthest part of existing track at top of the opening

To ensure a proper seal on the sides, many tracks are farther away from wall at top of opening.

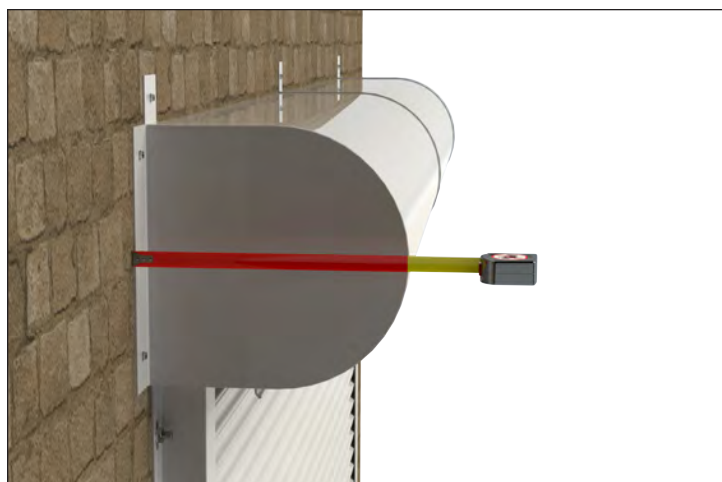

4

Wall to outside edge of roll or distance to back of roll

To ensure a tight seal on the sides.

09/30/24