



THE BUG BLOCKER® SCREEN


STANDARD LIFT
DUAL TRACK

COMPANY		PREPARED BY	
EMAIL		PHONE NUMBER	
ADDRESS			
CITY		STATE	ZIP
PURCHASE ORDER NUMBER		DATE REQUIRED	QTY
TAG			
SPECIAL INSTRUCTIONS (Please note if this is for a quote)			

- A** Any interference for Rasco track? Yes No
- B** Select Option:
 - High lift the existing track 8 inches
 - Add fixed panel to top of opening
- C** Distance floor to existing track? ____ ft ____ in
- D** Distance from wall to furthest part of existing track at the top of the opening or if fixed panel used, at the bottom of that? ____ in
- E** Opening Width: ____ ft ____ in
- F** Opening Height: ____ ft ____ in
- G** Distance from track to bollard? ____ in
- H** Distance from outside to outside of existing track? ____ ft ____ in
- I** Existing Door Width: ____ ft ____ in
- J** Existing Door Height: ____ ft ____ in
- K** Is the existing track in good condition? Yes No
- L** What is the existing track width? 2 in 3 in
- M** Is the Rasco door motor operated? Yes No
- N** What is the existing door thickness? ____ in
- O** Mesh size?
 - 12 mesh stainless 30 mesh stainless
 - 16 mesh stainless Special
- P** Rasco door track size? 2 in 3 in


✉ EMAIL SURVEY FORM TO RASCO

DOOR SIDE VIEW

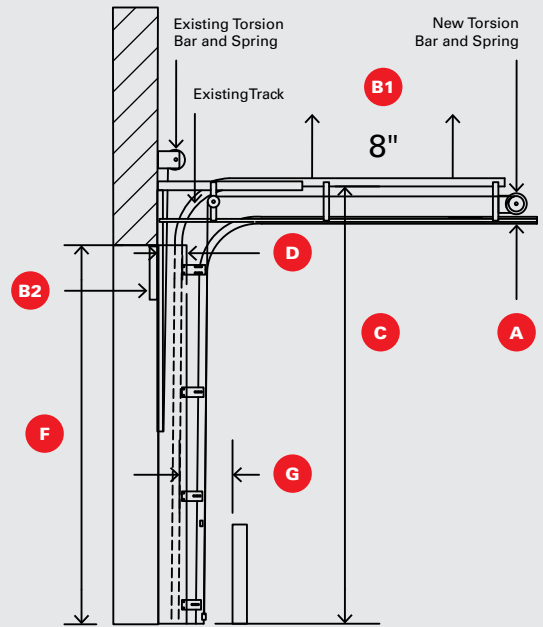


NOTES: A torsion bar support is required on all doors 10' or wider.
Dual track cannot be used if existing door has outside pull cables.
The Rasco door has outside pull brackets/cables.

DOORTOP ABOVE

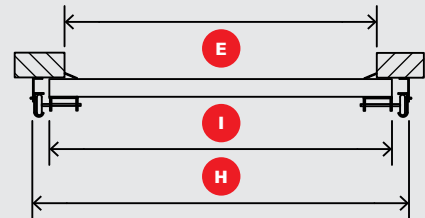

DUAL TRACK CLOSE UP

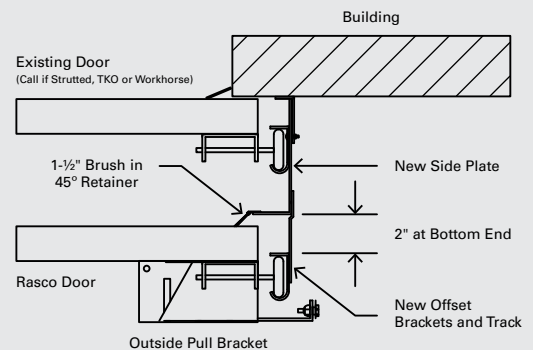


Measuring Guide



1

Track to bollard

To make sure you have clearance for your Rasco door.

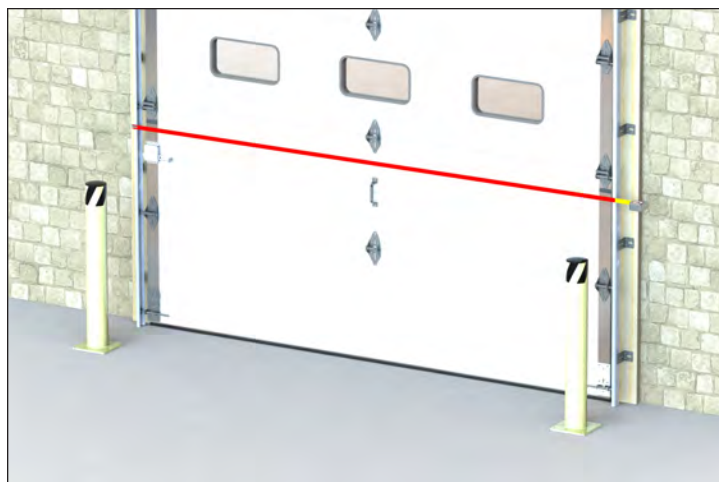

2

Outside to outside of existing track


To ensure a proper fit with your door.



3

Distance from wall to furthest part of existing track at top of the opening

To ensure a proper seal on the sides, many tracks are farther away from wall at top of opening.

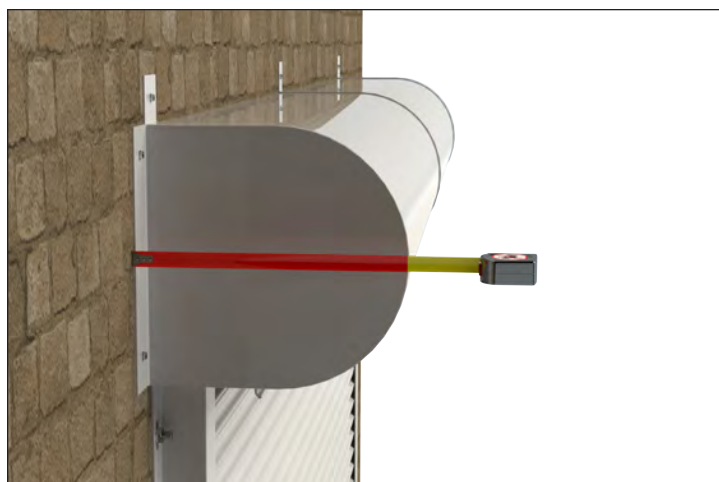

4

Wall to outside edge of roll or distance to back of roll

To ensure a tight seal on the sides.

09/30/24